


Service Windows

can be equipped with transaction drawers, bullet resistant glass, a variety of counter tops such as stainless steel and other options, all tailored to your specific needs.

Key:

X - Slide Panel, O - Fixed Panel

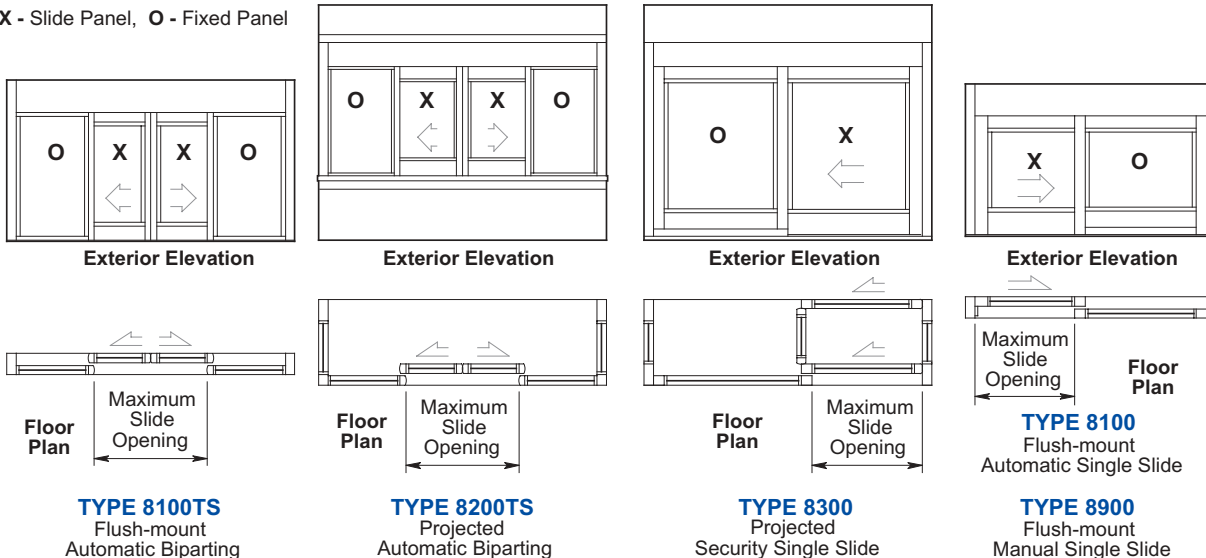

DATA FOR ALL STANDARD PACKAGES

Window Unit Type	Standard Unit Size		Maximum Slide Opening	Other
	Width	Height		
8100 O-X or X-O	48" (1219)	30" (762)	18 1/2" (470)	1" (25) insulated glass or 1/4" (6) prep without glass
	48" (1219)	36" (914)	18 1/2" (470)	
	48" (1219)	48" (1219)	18 1/2" (470)	
	47 1/2" (1207)	44" (1118)	18" (457)	
	45 1/2" (1156)	38" (965)	16" (406)	
	50" (1270)	38" (965)	20 1/2" (521)	
8100TS O-X-X-O	53 1/2" (1359)	38" (965)	21" (533)	thin stile panels, 1/4" (6) tempered glass
8200TS O-X-X-O	53 1/2" (1359)	38" (965)	21" (533)	thin stile panels, 1/4" (6) tempered glass, 1/4" (6) glass canopy stainless steel counter & metal apron
8300 O-X/O-X or X-O/X-O	50 1/4" (1276)	45 5/8" (1158)	21" (533)	synchronized interlocking slide panels, 1/4" (6) tempered glass in projected panels, 1" (25) insulated glass in front panels, metal canopy & stainless steel counter
8900 O-X or X-O	(Same as Type 8100)			recessed pull, 1" (25) insulated glass or 1/4" (6) prep without glass



4242 Baldwin Boulevard
Corpus Christi,
Texas, U.S.A. 78405-3399
Tel: 800-531-3111, 361-888-5591
Fax: 800-531-3108, 361-888-6510
www.hortondoors.com

Horton Automatics, Ltd.
Unit A, Hortonwood 31
Telford, Shropshire, England TF1-7YZ
Tel: 01952 670169, Fax: 0192 670181
International Tel: ++44-1952-670169
International Fax: ++44-1952-670181



A Division of OverheadDoor Corporation
A Sanwa Shutter Company

Form D500, Rev. 5/03
© 1990 Horton Automatics
Printed in U.S.A.

Horton Automatics reserves the right to alter its product and specifications without notice.